

Research Article

Influence of Injection Pressure on Exhaust Emissions of High Grade Semi Adiabatic Diesel Engine Fuelled with Preheated Cotton Seed Biodiesel

D. Srikanth[†], M.V.S. Murali Krishna^{*†} and P. Usha Sri[†]

[†]Department of Mechanical Engineering, Sagar Group of Educational Institutions, Chevella, Hyderabad- 5010503, Telangana State, India

[‡]Department of Mechanical Engineering, Chaitanya Bharathi Institute of Technology, Hyderabad- 500 075, Telangana India

[†]Department of Mechanical Engineering, College of Engineering, Osmania University, Hyderabad- 500007, Telangana State, India

Accepted 05 Feb 2016, Available online 07 Feb 2016, Vol.6, No.1 (Feb 2016)

Abstract

Biodiesels derived from vegetable oils present a very promising alternative for diesel fuel, since they have numerous advantages compared to fossil fuels. They are renewable, biodegradable, provide energy security and foreign exchange savings besides addressing environmental concerns and socio-economic issues. However drawbacks associated with biodiesel of high viscosity and low volatility which cause combustion problems in CI engines, call for engine with hot combustion chamber. They have significant characteristics of higher operating temperature, maximum heat release, and ability to handle low calorific value fuel. Investigations were carried out to determine exhaust emissions with low heat rejection combustion chamber with crude cotton seed biodiesel. It consisted of an air gap insulated piston, an air gap insulated liner and ceramic coated cylinder head with different operating conditions of cotton seed biodiesel with varied injector opening pressure. Exhaust emissions were determined at full load operation of the engine. Comparative studies were made for engine with LHR combustion chamber and CE at manufacturer's recommended injection timing (27° bTDC) with biodiesel operation. Engine with LHR combustion chamber with biodiesel showed reduction of particulate emissions at 27° bTDC over CE.

Keywords: Biodiesel; Conventional engine, LHR combustion chamber; Exhaust emissions

1. Introduction

Fossil fuels are limited resources; hence, search for renewable fuels is becoming more and more prominent for ensuring energy security and environmental protection. It has been found that the vegetable oils are promising substitute for diesel fuel, because of their properties are comparable to those of diesel fuel. They are renewable and can be easily produced. When Rudolph Diesel, first invented the diesel engine, about a century ago, he demonstrated the principle by employing peanut oil. He hinted that vegetable oil would be the future fuel in diesel engine [S.K. Acharya *et al*, 2009]. Several researchers experimented the use of vegetable oils as fuel on conventional engines (CE) and reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. It caused the problems of piston ring sticking, injector and combustion chamber deposits, fuel system deposits, reduced power, reduced fuel economy and increased exhaust emissions [S.K. Acharya *et al*, 2009; B.K. Venkanna *et al*, 2009;

R.D.Misra *et al*, 2010; Soo Young, 2011; Avinash Kumar Agarwal *et al*, 2013].

The problems of crude vegetable oils can be solved to some extent, if these oils are chemically modified (esterified) to biodiesel. Studies were made with biodiesel on CE [Rakopoulos *et al*, 2008; McCarthy *et al*, 2011; Anirudh Gautam *et al*, 2013; Durga Prasada Rao *et al*, 2013]. They reported from their investigations that biodiesel operation showed comparable thermal efficiency, decreased particulate emissions and increased nitrogen oxide (NO_x) levels, when compared with mineral diesel operation.

Experiments were conducted on preheated vegetable oils in order to equalize their viscosity to that of mineral diesel may ease the problems of injection process [Pugazhvadivu *et al*, 2005; , D. Agarwal *et al*, 2007; , Hanbey Hazar *et al*; 2007]. Investigations were carried out on engine with preheated vegetable oils. They reported that preheated vegetable oils marginally increased thermal efficiency, decreased particulate matter emissions and NO_x levels, when compared with normal biodiesel.

Increased injector opening pressure may also result in efficient combustion in compression ignition engine

*Corresponding author: M.V.S. Murali Krishna

[Celikten, I. 2003; Avinash Kumar Agarwal *et al*, 2013]. It has a significance effect on performance and formation of pollutants inside the direct injection diesel engine combustion. Experiments were conducted on engine with biodiesel with increased injector opening pressure. They reported that performance of the engine was improved, particulate emissions were reduced and NO_x levels were increased marginally with an increase of injector opening pressure.

The drawbacks associated with biodiesel (high viscosity and low volatility) call for hot combustion chamber, provided by low heat rejection (LHR) combustion chamber. The concept of the engine with LHR combustion chamber is reduce heat loss to the coolant with provision of thermal resistance in the path of heat flow to the coolant. Three approaches that are being pursued to decrease heat rejection are (1) Coating with low thermal conductivity materials on crown of the piston, inner portion of the liner and cylinder head (low grade LHR combustion chamber); (2) air gap insulation where air gap is provided in the piston and other components with low-thermal conductivity materials like superni (an alloy of nickel), cast iron and mild steel (medium grade LHR combustion chamber); and (3). High grade LHR engine contains air gap insulation and ceramic coated components.

Experiments were conducted on engine with high grade LHR combustion chamber with biodiesel. It consisted of an air gap (3 mm) insulation in piston as well as in liner and ceramic coated cylinder head. The engine was fuelled with biodiesel with varied injector opening pressure and injection timing [Krishna Murthy, 2010; T.Ratna Reddy *et al*, 2012; N. Janardhan *et al*, 2012; Venkateswara Rao *et al*, 2013; Venkateswara Rao *et al*, 2013; Murali Krishna *et al*, 2013; B.Subba Rao *et al*, 2013; Murali Krishna *et al*, 2014]. They reported from their investigations, that engine with LHR combustion chamber at an optimum injection timing of 28° bTDC with biodiesel increased brake thermal efficiency by 10–12%, at full load operation–decreased particulate emissions by 45–50% and increased NO_x levels, by 45–50% when compared with mineral diesel operation on CE at 27° bTDC.

The present paper attempted to determine the performance of the engine with high grade LHR combustion chamber. It contained an air gap (3.2 mm) insulated piston, an air gap (3.2 mm) insulated liner and ceramic coated cylinder head with cotton seed biodiesel with different operating conditions with varied injector opening pressure. Results were compared with CE with biodiesel and also with diesel at similar operating conditions.

Table.1 Properties of test fuels

Property	Units	Diesel (DF)	Biodiesel(BD)	ASTM Standard
Carbon Chain	--	C ₈ -C ₂₈	C ₁₆ -C ₂₄	---
Cetane Number	-	51	56	ASTM D 613
Specific Gravity at 15°C	-	0.8275	0.8673	ASTM D 4809
Bulk Modulus at 15°C	MPa	1408.3	1564	ASTM D 6793
Kinematic Viscosity @ 40°C	cSt	2.5	5.44	ASTM D 445
Air Fuel Ratio (Stoichiometric)	--	14.86	13.8	--
Flash Point (Pensky Marten's Closed Cup)	°C	120	144	ASTM D93
Cold Filter Plugging Point	°C	Winter 6° C Summer 18°C	3° C	ASTM D 6371
Pour Point	°C	Winter 3°C Summer 15°C	0°C	ASTM D 97
Sulfur	(mg/kg, max)	50	42	ASTM D5453
Low Calorific Value	MJ/kg	42.0	39.9	ASTM D 7314
Oxygen Content	%	0.3	11	--

2. Material and method


Cottonseeds have approximately 18% (w/w) oil content. India's cottonseed production is estimated to be around 35% of its cotton output (approximately 4.5millionmetric tons). Approximately 0.30 million metric ton cottonseed oil is produced in India and it is an attractive biodiesel feedstock.

2.1 Preparation of biodiesel

The chemical conversion of esterification reduced viscosity four fold. Crude cotton seed oil contains up to 70 % (wt.) free fatty acids. The methyl ester was produced by chemically reacting crude cotton seed oil with methanol in the presence of a catalyst (KOH). A two-stage process was used for the esterification of the

crude cotton seed oil. The first stage (acid-catalyzed) of the process is to reduce the free fatty acids (FFA) content in cotton seed oil by esterification with methanol (99% pure) and acid catalyst (sulfuric acid-98% pure) in one hour time of reaction at 55°C. Molar ratio of cotton seed oil to methanol was 9:1 and 0.75% catalyst (w/w).

In the second stage (alkali-catalyzed), the triglyceride portion of the cotton seed oil reacts with methanol and base catalyst (sodium hydroxide-99% pure), in one hour time of reaction at 65°C, to form methyl ester (biodiesel) and glycerol. To remove unreacted methoxide present in raw methyl ester, it is purified by the process of water washing with air-bubbling. The properties of the Test Fuels used in the experiment were presented in Table-1.

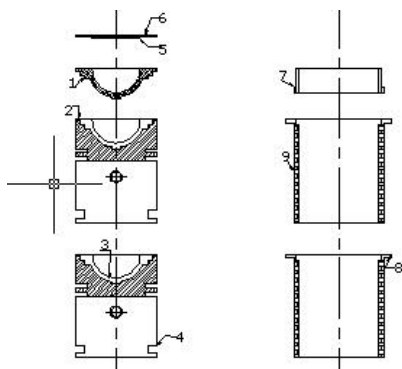


1. Piston crown with threads, 2. Superni gasket, 3. Air gap in piston, 4. Body of piston, 5. Ceramic coating on inside portion of cylinder head, 6. Cylinder head, 7. Superni insert with threads, 8. Air gap in liner, 9. Liner

Fig.1 Assembly details of air gap insulated piston, air gap insulated liner and ceramic coated cylinder head

2.4 Experimental set-up

The schematic diagram of the experimental setup used for the investigations on the engine with LHR combustion chamber with cotton seed biodiesel is shown in Fig.2. Specifications of Test engine are given in Table 2. The engine was coupled with an electric dynamometer (Kirloskar), which was loaded by a loading rheostat. The fuel rate was measured by Burette. The accuracy of brake thermal efficiency obtained is $\pm 2\%$. Provision was made for preheating of biodiesel to the required levels (90°C) so that its viscosity was equalized to that of diesel fuel at room temperature. Air-consumption of the engine was obtained with an aid of air box, orifice flow meter and U-tube water manometer assembly. The naturally aspirated engine was provided with water-cooling system in which outlet temperature of water was maintained at 80°C by adjusting the water flow rate. The water flow rate was measured by means of analogue water flow meter, with accuracy of measurement of $\pm 1\%$.

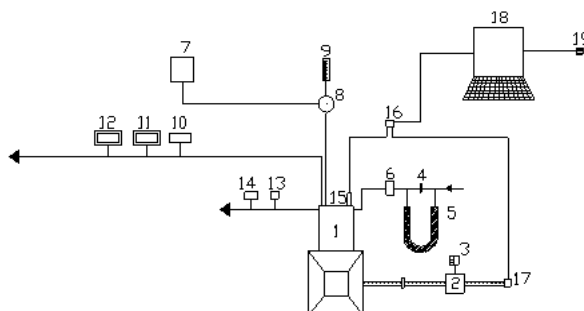

1. Four Stroke Kirloskar Diesel Engine, 2. Kirloskar Electrical Dynamometer, 3. Load Box, 4. Orifice flow meter, 5. U-tube water manometer, 6. Air box, 7. Fuel tank, 8. Preheater 9. Burette, 10. Exhaust gas temperature indicator, 11. AVL Smoke opacity meter, 12. Netel Chromatograph NO_x Analyzer, 13. Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter, 15. AVL Austria Piezo-electric pressure transducer, 16. Console, 17. AVL Austria TDC encoder, 18. Personal Computer and 19. Printer.

Fig.2 Schematic diagram of experimental set-up

Table.2 Specifications of Test Engine

Description	Specification
Engine make and model	Kirloskar (India) AV1
Maximum power output at a speed of 1500 rpm	3.68 kW
Number of cylinders \times cylinder position \times stroke	One \times Vertical position \times four-stroke
Bore \times stroke	80 mm \times 110 mm
Engine Displacement	553 cc
Method of cooling	Water cooled
Rated speed (constant)	1500 rpm
Fuel injection system	In-line and direct injection
Compression ratio	16:1
BMEP @ 1500 rpm at full load	5.31 bar
Manufacturer's recommended injection timing and injector opening pressure	27 $^{\circ}$ bTDC \times 190 bar
Number of holes of injector and size	Three \times 0.25 mm
Type of combustion chamber	Direct injection type

Engine oil was provided with a pressure feed system. No temperature control was incorporated, for measuring the lube oil temperature. Injector opening pressure was changed from 190 bar to 270 bar using

nozzle testing device. The maximum injector opening pressure was restricted to 270 bar due to practical difficulties involved. Coolant water jacket inlet temperature, outlet water jacket temperature and

Table.3 Specifications of the Smoke Opacimeter (AVL, India, 437). And NO_x Analyzer (Netel India; 4000 VM)

Pollutant	Measuring Principle	Range	Least Count	Repeatability
Particulate Emissions	Light extinction	1–100 %	0.1% of Full Scale (FS)	0.1% for 30 minutes
NO _x	Chemiluminiscence	1–5000 ppm	0.5 % F.S	≤0.5% F.S

exhaust gas temperature were measured by employing iron and iron-constantan thermocouples connected to analogue temperature indicators. The accuracies of analogue temperature indicators are $\pm 1\%$.

Exhaust emissions of particulate matter and nitrogen oxides (NO_x) were recorded by smoke opacity meter (AVL India, 437) and NO_x Analyzer (Netel India; 4000 VM) at full load operation of the engine. Table 3 shows the measurement principle, accuracy and repeatability of raw exhaust gas emission analyzers/measuring equipment for particulate emissions and NO_x levels. Analyzers were allowed to adjust their zero point before each measurement. To ensure that accuracy of measured values was high, the gas analyzers were calibrated before each measurement using reference gases.

2.7 Test conditions

Test fuels used in the experiment were neat diesel and biodiesel. Various configurations of the engine were conventional engine and engine with LHR combustion chamber. Different operating conditions of the biodiesel were normal temperature and preheated temperature. Different injector opening pressures attempted in this experiment were 190 and 270 bar. Various injection timings attempted in the investigations were manufacturer's recommended injection timing (27° bTDC) and optimum injection timing. Each test was repeated twelve times to ensure the reproducibility of data according to uncertainty analysis (Minimum number of trials must be not less than ten).

3. Results and Discussion

3.1 Exhaust emissions

Particulate emissions and NO_x are the exhaust emissions from diesel engine cause health hazards like inhaling of these pollutants cause severe headache, tuberculosis, lung cancer, nausea, respiratory problems, skin cancer, hemorrhage, etc. [Murali Krishna *et al*, 2004; Khopkar, 2010; Sharma, 2010]. In diesel engines, it is rather difficult to lower NO_x and particulate emissions simultaneously due to soot-NO_x tradeoff. High NO_x and particulate emissions are still the main obstacle in the development of next generation conventional diesel engines. Therefore, the major challenge for the existing and future diesel engines is meeting the very tough emission targets at affordable cost, while improving fuel economy. It was reported that fuel physical properties such as density and viscosity could have a greater influence on particular emission than chemical properties of the

fuel [Barsic *et al*, 1981]. Fig.5 shows variation of particulate emissions with biodiesel operation on both versions of the engine at recommended injection timing and optimum injection timing.

Fig.3 presents bar charts showing the variation of particulate emissions at full load with both versions of the engine at manufacturer's recommended injection timing and pressure. From Fig.3, it is noticed that particulate emissions at full load reduced marginally with CE with biodiesel operation in comparison with diesel operation on CE. Improved combustion with improved cetane number and also with presence of oxygen in composition of biodiesel might have reduced particulate emissions. Particulate emissions further reduced with engine with LHR combustion chamber, when compared with CE. Improved combustion with improved heat release rate might have further reduced particulate emissions.

From Fig.3, it is noticed that CE with biodiesel operation decreased particulate emissions at full load by 6% in comparison with CE with neat diesel. Particulate emissions reduced by 33% with LHR engine with biodiesel operation when compared with same version of the engine with diesel operation, which showed that LHR engine was more an alternative fuel like biodiesel. As the combustion chamber was insulated to greater extent, it was expected that high combustion temperatures would be prevalent in LHR engine. It tends to decrease the ignition delay thereby reducing pre-mixed combustion as a result of which, less time was available for proper mixing of air and diesel in the combustion chamber leading to incomplete combustion, with combustion deteriorated at full load with diesel operation. More over at this load, friction and increased diffusion combustion resulted from reduced ignition delay. Increased radiation losses might have also contributed to the deterioration. LHR engine with biodiesel showed reduction particulate emissions by 11% in comparison with CE with biodiesel operation.

Earlier studies have suggested following reasons for relatively lower particulate emissions with biodiesel (a) presence of fuel oxygen, (b) increase in the O/C ratio at the flame lift-off length, [The O/C (w/w) ratio here refers to the total oxygen (air and fuel) (w/w) in the combustible mixture to total carbon in the fuel. For biodiesel, carbon and oxygen content in the fuel was obtained from GC analysis. Oxygen originates from air and fuel (biodiesel) both. For diesel, the standard formula given in the published literature has been used to calculate the O/C ratio [Avinash Kumar Agarwal *et al*, 2013]. (c) longer flame liftoff length due to higher injection velocity obtained with biodiesel, and (d) superior fuel atomization due to higher injection pressures with biodiesel [Avinash Kumar Agarwal *et al*, 2013].

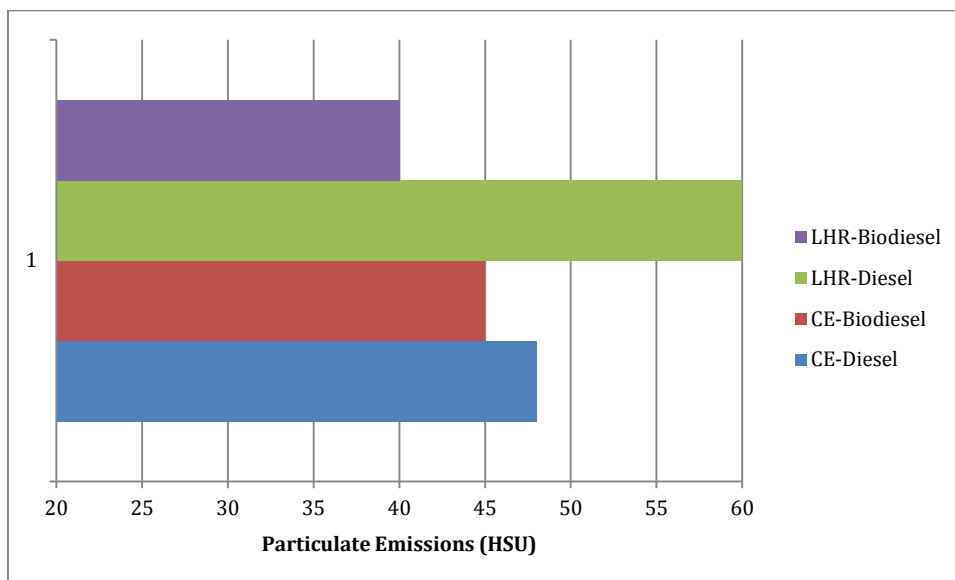


Fig.3 Bar charts showing the variation of particulate emissions in Hartridge Smoke Unit (HSU) at full load operation with test fuels with conventional engine (CE) and engine with LHR combustion chamber at recommended injection timings at an injector opening pressure of 190 bar

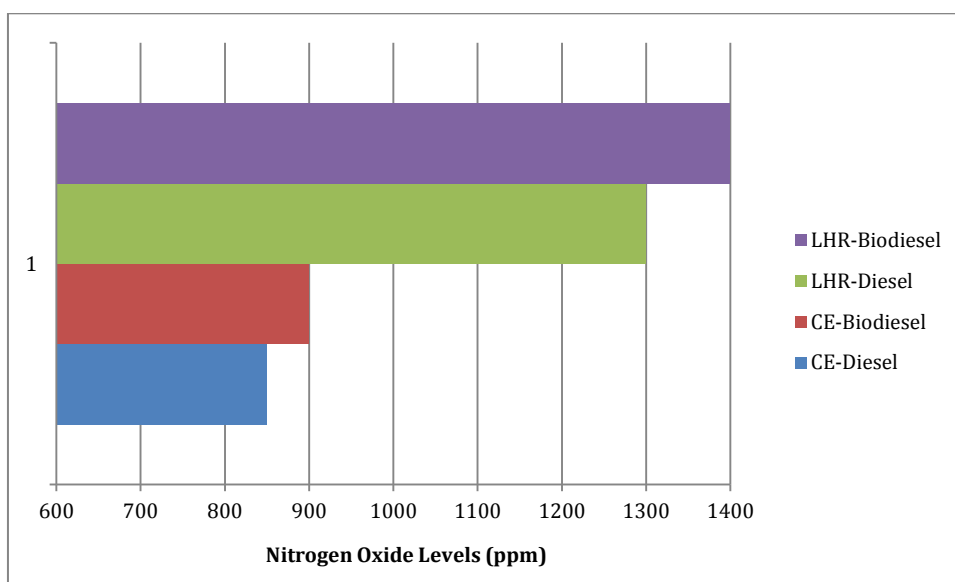


Fig.4 Bar charts showing the variation of nitrogen oxide (NO_x) levels at full load operation with test fuels with conventional engine (CE) and engine with LHR combustion chamber at recommended injection timing and at an injector opening pressure of 190 bar

The temperature and availability of oxygen are the reasons for the formation of NO_x levels. Fig.4. presents bar charts showing the variation of NO_x levels at full load with both versions of the engine with test fuels at recommended injection timing and at optimum injection timing. Biodiesel operation increased NO_x levels with both versions of the engine, in comparison with neat diesel operation on CE. The increase in NO_x emission might be an inherent characteristic of biodiesel due to the presence of long chain mono-unsaturated fatty acids (MUFA) and of poly-unsaturated fatty acids (PUFA). [P.V. Rao *et al*, 2011]. Presence of oxygen (10%) in the methyl ester, which leads to improve the oxidation of the nitrogen available

during combustion. This will raise the combustion bulk temperature responsible for thermal NO_x formation. The production of higher NO_x with biodiesel fueling is also attributable to an inadvertent advance of fuel injection timing due to its higher bulk modulus (1564 MPa) of compressibility, with the in-line fuel injection system. Similar observations were made by earlier researchers. [Avinash Kumar Agarwal *et al*, 2013].

From Fig.4, it is observed that CE with biodiesel operation increased NO_x levels at full load by 6% when compared with diesel operation on CE. LHR engine increased NO_x levels at full load by 8% in comparison with same version of the engine with diesel operation.

Table.4 Comparative data on Particulate Emissions & NO_x Levels at full load operation

Injection timing Combustion Chamber Version	Test fuel	Particulate emissions (Hartridge Smoke Unit)				NO _x levels (ppm)			
		Injector opening pressure (bar)				Injector opening pressure (bar)			
		190		270		190		270	
		NT	PT	NT	PT	NT	PT	NT	PT
27(CE)	DF	48	--	34	--	850	--	950	--
	BD	45	40	35	30	900	850	1000	950
27(LHR)	DF	60	---	50	---	1300	---	1200	--
	BD	40	35	30	25	1400	1350	1300	1250

Engine with LHR combustion chamber with biodiesel increased NO_x levels at full load operation by 44% at 27° bTDC in comparison with CE at 27° bTDC. Increase of combustion temperatures with the faster combustion and improved heat release rates caused higher NO_x levels in the engine with LHR combustion chamber in comparison with CE with biodiesel operation.

Table.4 shows exhaust emissions at full load with test fuels. Decreasing the fuel density tends to increase spray dispersion and spray penetration. Particulate emissions at full load decreased with preheating of biodiesel in both versions of the combustion chamber, as seen in Table.4. The factors responsible for reduction of particulate emissions with preheated biodiesel might be i) the reduction of density of the biodiesel, as density is directly related to particulate emissions, ii) the reduction of the diffusion combustion proportion with the preheated biodiesel, iii) the reduction of the viscosity of the biodiesel, with which the fuel spray does not impinge on the combustion chamber walls of lower temperatures rather than it is directed into the combustion chamber.

From Table.4. it is noticed that particulate emissions at full load reduced with an increase of injector opening pressure in both versions of the combustion chamber, with different operating conditions of the biodiesel. Higher fuel injection pressures improved fuel–air mixing followed by faster combustion which directly influences pollutant formation leading to reduce particulate emissions. [Heywood, 2013]. At higher injector opening pressure, particulate emissions in the exhaust reduced due to relatively superior fuel–air mixing. An increase in fuel injection pressure induces improvement in spray atomization, combustion and particulate emissions. Similar observations were reported by earlier studies. [P.V.Rao et al, 2011]. From Table.4, it is noticed that NO_x levels reduced with preheating of the biodiesel. The change of the properties of viscosity and surface tension of fuel with preheating may lead to different relative duration of premixed and diffusive combustion regimes, which have different emission formation characteristics. As fuel temperature was increased, there was an improvement in the ignition quality, which will cause shortening of ignition delay. A short ignition delay period lowers the peak combustion temperature which suppresses NO_x formation. From

Table.4, it is noted that NO_x levels increased in CE, while decreasing them in engine with LHR combustion chamber with different operating conditions of biodiesel with an increase of injector opening pressure. Enhanced spray characteristics, thus improving fuel air mixture preparation and evaporation process in CE might have increased gas temperatures with CE, which increased NO_x levels. Improved combustion with improved oxygen–fuel ratios in engine with LHR combustion chamber reduced particulate emissions.

Summary

1. Engine with LHR combustion chamber is efficient for alternative fuel like biodiesel rather than neat diesel.
2. The exhaust emissions improved with an increase of injector opening pressure and with preheating with both versions of the combustion chamber with biodiesel.
3. With preheating, particulate emissions improved by 11–12% when compared with normal biodiesel with both versions of the engine.
4. With an increase of injection pressure of 80 bar, particulate emissions decreased by 20—25% with both versions of the engine.
5. With preheating, nitrogen oxide levels decreased by 5– 6% with conventional engine with normal biodiesel. The effect of preheating on nitrogen oxide levels is minimum with LHR engine.
6. With an increase of injection pressure of 80 bar, nitrogen oxide levels increased by 11% with conventional engine, while with LHR engine, they decreased by 4% at full load operation.

Novelty

Engine parameter (injection pressure) fuel operating conditions (normal temperature and preheated temperature) and different configurations of the engine (conventional engine and engine with LHR combustion chamber) were used simultaneously to improve performance, exhaust emissions and combustion characteristics of the engine. Exhaust emissions were influenced by injection pressure, fuel operating condition and configuration of the combustion chamber.

Highlights

- Fuel injection pressure affect engine performance, exhaust emissions and combustion characteristics.
- Performance, exhaust emissions and combustion characteristic improve with preheating of biodiesel

Future Scope of Work

Engine with LHR combustion chamber gave higher NO_x levels, which can be controlled by means of the selective catalytic reduction (SCR) technique using lanthanum ion exchanged zeolite (catalyst-A) and urea infused lanthanum ion exchanged zeolite (catalyst-B) with different versions of combustion chamber at full load operation of the engine [N.Janardhan *et al*, 2012]

Acknowledgments

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out this research work. Financial assistance provided by All India Council for Technical Education (AICTE), New Delhi is greatly acknowledged.

References

- Acharya, S.K., Swain, R.K. and Mohanti, M.K. (2009), The use of rice bran oil as a fuel for a small horse-power diesel engine. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, 33(1), pp 80-88.
- Venkanna, B.K., Venkataramana Reddy, C., Swati, B. and Wadawadagi. (2009), Performance, emission and combustion characteristics of direct injection diesel engine running on rice bran oil / diesel fuel blend. *International Journal of Chemical and Biological Engineering*, 2(3), pp131-137.
- Misra, R.D. and Murthy, M.S. (2010), Straight vegetable oils usage in a compression ignition engine—A review. *Renewable and Sustainable Energy Reviews*, 14, pp 3005–3013.
- Soo-Young, No. (2011), Inedible vegetable oils and their derivatives for alternative diesel fuels in CI engines: A review. *Renew Sustain Energy Rev*, 15, pp 131–149.
- Avinash Kumar Agarwal and Atul Dhar. (2013), Experimental investigations of performance, emission and combustion characteristics of Karanja oil blends fuelled DIC engine, *Renewable Energy*, 52, pp 283–291.
- Rakopoulos, C.D., Rakopoulos, D.C., Hountalas, D.T. (2008), Performance and emissions of bus engine using blends of diesel fuel with biodiesel of sunflower or cottonseed oils derived from Greek feedstock, *Fuel*, 87: pp 147–157, 2008.
- McCarthy, P.M., Rasul, M.G. and Moazzem. (2011), Analysis and comparison of performance and emissions of an internal combustion engine fuelled with petroleum diesel and different biodiesels, *Fuel*, 90, pp 2147–2157.
- Anirudh Gautam and Avinash Kumar Agarwal, (2013), Experimental investigations of comparative performance, emission and combustion characteristics of a cottonseed biodiesel fueled four–stroke locomotive diesel engine, *Int J Engine Res*, 14, pp354-370, 2013.
- Krishna, Maddali. and Chowdary, R. (2014), Comparative studies on performance evaluation of waste fried vegetable oil in crude form and biodiesel form in conventional diesel engine, *SAE Paper 2014–01–1947*, 2014.
- Durga Prasada Rao, N., Murali Krishna, M.V.S., Anjeneya Prasad, B. and Murthy, P.V.K. (2014), Effect of injector opening pressure and injection timing on exhaust emissions and combustion characteristics of rice bran oil in crude form and biodiesel form in direct injection diesel engine. *IOSR Journal of Engineering*, 4(2), pp 9-19, 2014.
- Pugazhivadivu, M. and Jayachandran. (2005), Investigations on the performance and exhaust emissions of a diesel engine using preheated waste frying oil as fuel, *Renew energy*, 30(14), pp 2189-2202, 2005.
- Agarwal, D. and Agarwal, A.K. (2007), Performance and emissions characteristics of jatropha oil preheated and blends in a direct injection compression ignition engine, *Appl. Therm. Eng.* 27(13), pp 2314–2323.
- Hanbey Hazar and Huseyin Aydin, (2007), Performance and emission evaluation of a CI engine fueled with preheated raw rapeseed oil (RRO)-diesel blends, *Applied Energy*, 87, pp 786–790, 2007.
- Celikten, I. (2003), An experimental investigation of the effect of the injection pressure on engine performance and exhaust emission in indirect injection diesel engines, *Appl Therm Eng*, 23, pp 2051–60,
- Avinash Kumar Agarwal, Dhananjay Kumar Srivastava, Atul Dhar, et al., (2013), Effect of fuel injection timing and pressure on combustion, emissions and performance characteristics of a single cylinder diesel engine, *Fuel* 111, pp 374–83.
- Krishna Murthy, P.V. (2010), Studies on biodiesel with low heat rejection diesel engine. PhD Thesis, J. N. T. University, Hyderabad, 2010.
- Ratna Reddy, T., Murali Krishna, M.V.S., Kesava Reddy, Ch. and Murthy, P.V.K. (2012), Performance evaluation of a low heat rejection diesel engine with mohr oil based biodiesel, *British Journal of Applied Science & Technology*, vol. 2, no.2, pp 179-198.
- Janardhan, N., Ushasri, P., Murali Krishna, M.V.S. and Murthy, P.V.K. (2012), Performance of biodiesel in low heat rejection diesel engine with catalytic converter. *International Journal of Engineering and Advanced Technology*, vol. 2, no.2, pp 97-109.
- Venkateswara Rao, N., Murali Krishna, M.V.S. and Murthy, P.V.K. (2013), Effect of injector opening pressure and injection timing on exhaust emissions and combustion characteristics of high grade low heat rejection diesel engine with tobacco seed oil based biodiesel, *Int J Recent Technol Eng* 13; 2(4), pp 70–79.
- Venkateswara Rao, N., Murali Krishna, M.V.S. and Murthy, P.V.K. (2013), Effect of injector opening pressure and injection timing on performance parameters of high grade low heat rejection diesel engine with tobacco seed oil based biodiesel, *Int J Current Eng & Tech*, 3(4), pp 1401–1411.
- Murali Krishna, M.V.S., Durga Prasada Rao, N. and Anjeneya Prasad, B. (2013), Comparative studies on exhaust emissions and combustion characteristic of direct injection diesel engine with different combustion chamber with rice bran oil based biodiesel, *Int J Eng Innovative Technol*, 3(6), pp 163–173, 2013,
- Subba Rao, B., Ramjee, E., Murthy, P.V.K. and Murali Krishna, M.V.S. (2013), Studies on exhaust emissions and combustion characteristics of tobacco seed oil in crude form and biodiesel from a high grade low heat rejection diesel engine, *International Journal of Industrial Engineering and Technology*, 3(1), pp 27-36.
- Murali Krishna, M.V.S., Janardhan, N., Kesava Reddy, Ch. and Krishna Murthy, P.V.K. (2014), Experimental investigations on DI diesel engine with different combustion chambers,

- British Journal of Applied Science & Technology, 6(3), pp239-260.
- Murali Krishna, M.V.S. (2004), Performance evaluation of low heat rejection diesel engine with alternative fuels, PhD Thesis, J. N. T. University, Hyderabad, India.
- Khopkar, S.M. (2010), Environmental Pollution Analysis, [New Age International (P) Ltd, Publishers, New Delhi], pp 180-190.
- Sharma, B.K. (2010), Engineering Chemistry, [Pragathi Prakashan (P) Ltd, Meerut], pp 150-160..
- Heywood, J.B. (2013), Internal Combustion Engine Fundamentals, McGraw-Hill Book Company, New Delhi.
- Rao, P.V. (2011), Effect of properties of Karanja methyl ester on combustion and NO_x emissions of a diesel engine. J Petroleum Tech & Alternative Fuels, 2(5), pp 63-75.
- Barsic, N.J. and Humke, A.L. (1981), Performance and emission characteristics of naturally aspirated engine with the vegetable oil fuels", SAE 810262, 1981.
- Janardhan, N., Usha Sri, P. and Murali Krishna, M.V.S. (2012), Performance of biodiesel in low heat rejection diesel engine with catalytic converter, Int J Eng & Advanced Tech 2012; 2(2), pp 97-109.